


## 4-Port USB 3.0 PCI-E [x4] Frame Grabber Card



### Features

- PCI-Express® [x4] Gen. 2 Compliant
- 4 Independent USB 3.0 Host Controller
- Support Bandwidth 5 Gb/s for Each Port
- Support Lockable USB Connector

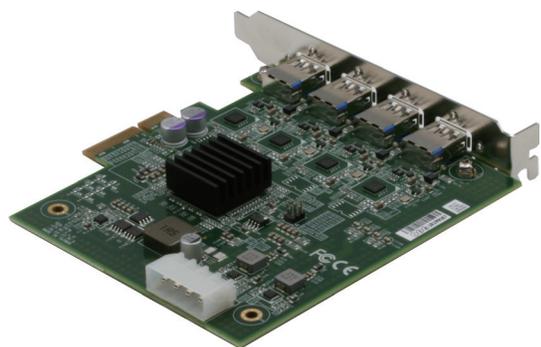

### Specifications

System	
Bus Interface	PCI-Express® [x4], Gen 2 PCI-Express Specification Revision 2.1 at 5GT/s
USB	4 independent USB3.0 host controllers 900mA @ 5V for each port Compliant with USB 3.0 Specification Revision 1.0 4 downstream USB ports support SS/HS/FS/LS data rates (5Gbps/480Mbps/12Mbps/1.5Mbps)
USB Connector	4 USB 3.0 Type-A connectors with lockable screw threads
OS Support	Windows® 10, Windows® 8.1 (32/64-bit), Windows® 7(32/64-bit) Linux
Power Supply	
Power Requirement	12V from external IDE 4-pin power connector
Mechanical	
Dimensions (W x D)	120mm(W) x 107mm(D)
Environmental	
Operating Temperature	0°F ~ 140°F (0°C ~ 60°C) (according to IEC68-2-14 with 0.5 m/s AirFlow ; with industrial devices)
Storage Temperature	-49°F ~ 185°F (-45°C ~ 80°C)
Storage Humidity	5 ~ 95% @ 40°C, non-condensing

### Ordering Information

- **PER-T479-A10-00**  
4-Port USB 3.0 PCI-E [x4] Frame Grabber Card