

embedian

A9



SMARC



freescale™

SMARC-FIMX6



HIGHLIGHTS

- Freescale i.MX6 ARM Cortex-A9
- 1GHz, Solo/Dual Lite/Dual/Quad Core
- Up to 2GB DDR3, 4GB eMMC, SD/MMC
- Parallel RGB, HDMI, LVDS 1600x1200
- 2CAN, 4UART, 5¹C, 1PCIe
- 1 Gigabit LAN
- Long-term availability (10+ years)
- SMARC 1.0 or 1.1 Compliant

SMARC-FIMX6 with maximum flexibility

The highly scalable SMARC-FIMX6 modules with single, dual lite, dual or quad core Freescale i.MX6 processors cover an extremely wide performance range. Based on the ARM Cortex A9 technology, they support a huge variety of industry standard interfaces, while at the same time providing advanced multimedia and high speed connectivity making it suitable for an almost unlimited number of applications.

The benefits of standardization are listed as follows.

Reduced cost

Mass production equals a better price performance ratio

Improved quality

Mass production equals higher product quality

Improved negotiating power for the buyer

Standards drive product differentiation and competition toward price and service and away from features. This gives buyer both better pricing and better support.

Standard architectures

Allows software teams to develop new applications faster with fewer people.

Scalable and flexible

More module offerings can be applied to the same platform.



modularized
design

low power

wide
temperature

extensive
supports

cost
effective

high
performance

long
lifecycle

Technical Information


SMARC-FIMX6 Module

Processor	Freescall i.MX6 1GHz ARM Cortex-A9
Memory	Onboard 4GB eMMC Onboard DDR3 up to 2GB Onboard 4MB SPI NOR Flash Onboard 4KB EEPROM
Networking	1 x 10/100/1000Mbps Ethernet
Display	Parallel RGB/LVDS/HDMI
Expansion	SD/SDHC, USB Host 2.0, PCIe
USB	1 x USB Host 2.0, 1 x USB OTG
Additional Interfaces	4 x UARTs, 2 x SPIs, 5 x I2C, 1 x I2S, 2 x CAN Bus, Camera Input, PWM, 12 x GPIOs, SATA
SW Support	Linux 3.14.28, Yocto Ubuntu 14.04 or Android 5.0
Power	1.5 ~ 3.5Watts Typical

Evaluation Carrier (mini-ITX, 12V~24V)

Ethernet	2 (RJ45)
RS 232	4 (2 x DB9, 2 x 2.0mm header)
USB	1 x mini-B, 1 x Type A, 2 x mini-PCle
SATA	SATA Connector
SD/SDMMC	1 x SD Connector, 1 x 4GB eMMC
CAN Bus	2 (10-way 2mm header)
SPI	4 (6-way 2mm header)
I2C	2 (4-way 2mm header)
GPIO	12 (14-way 2mm header)
dual-channel LVDS	24-bit board-to-board connector
Parallel LCD	1 x 24-bit DB15 Connector
PCIe/mini-PCle	1 x PCIe, 2 x mini-PCle Connector
Stereo Audio	3.5mm Audio Jack
HDMI	HDMI Connector

Block Diagram

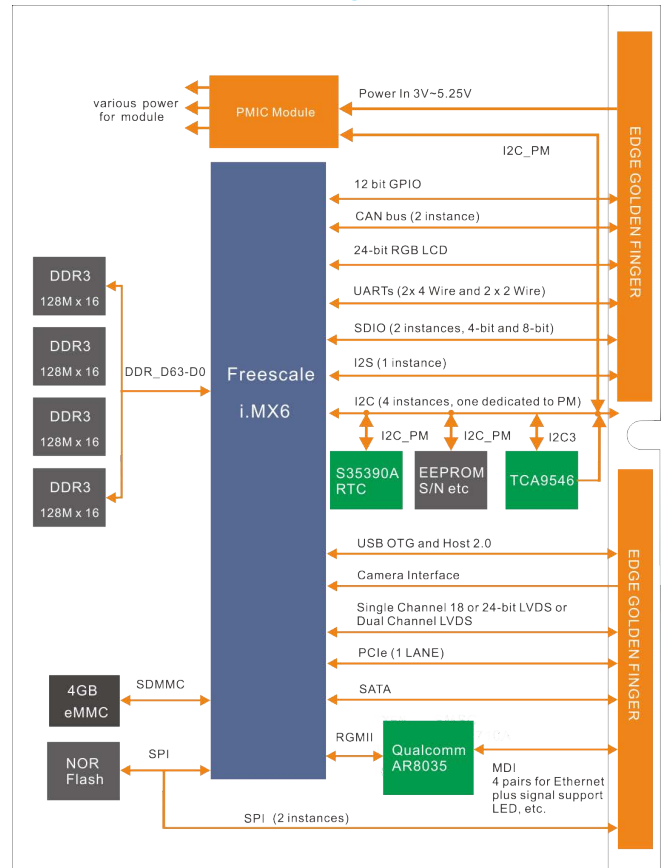

Evaluation Kit – Accelerated Design

The SMARC-FiMX6 Evaluation Kit is intended to serve multiple needs and summarized as followed:

- SMARC-FiMX6 bring-up platform for hardware and software development.
- Module validation platform.
- Customer evaluation platform.
- Customer design reference.
- Manufacturing test platform.
- Flexible prototyping vehicle (facilitated by multiple mezzanines).



Embedian, Inc.

4F.-7 432 Keelung Rd. Sec.1

Taipei 11051, Taiwan

Tel: +886 2 2722 3291

<http://www.embedian.com>