

E24S-2101


IDE to mSATA & mSATA mini 2.5" Module



Features

- Supports mSATA & mSATA mini card to IDE in 2.5" F/F.
- Compliance with Gen1i/Gen1m of Serial ATA II Electrical Specification 2.6.
- Supports wide temp.
- 3 years warranty.
- Industrial design, manufacture in innodisk Taiwan

Mechanical Drawing

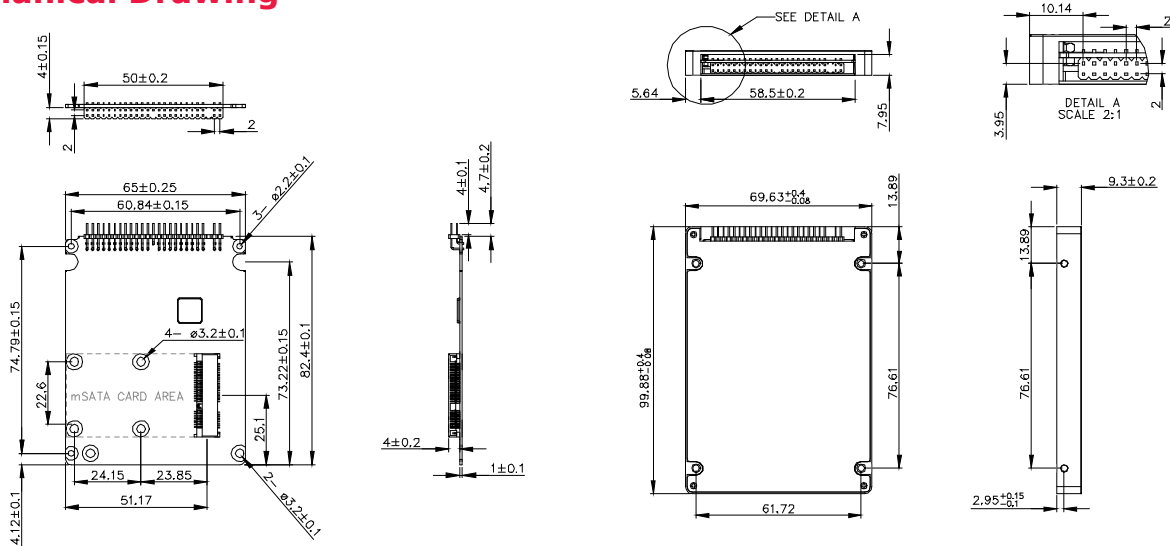

Specifications

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-040-282-1818

Japan

jpsales@innodisk.com
+81-45-594-7581

China

sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

May 22, 2015

Form-Factor	2.5" SSD
Input I/F	IDE
Output I/F	SATA II
Output Connector	mSATA x 1
TDP	1.5W (5V x 300mA)
Dimension (WxLxH)	69.63 x 99.88 x 9.3mm, Weight: 80g
Temperature	Operation: STD: 0°C ~ +70°C WT: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	

Order information

E24S-2101-C1

IDE to mSATA & mSATA mini 2.5" Module, ST

E24S-2101-W1

IDE to mSATA & mSATA mini 2.5" Module, WT