

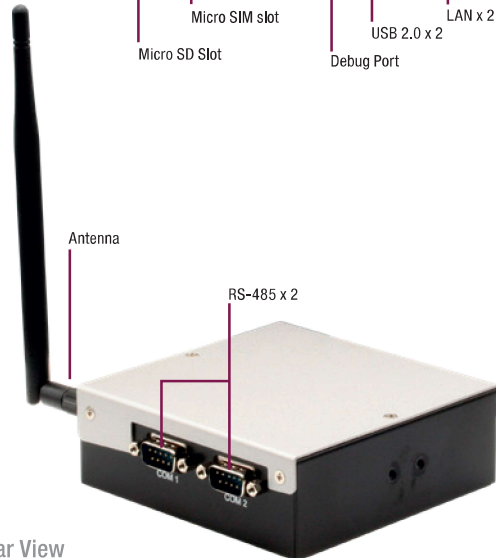


Front View

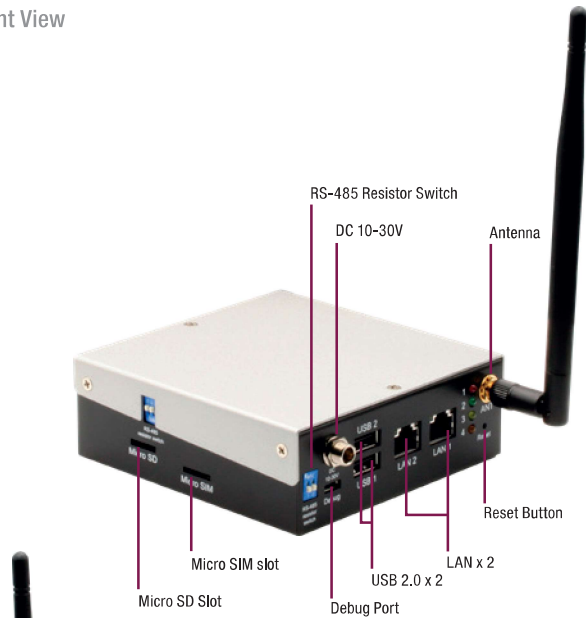

Rear View

Bottom View

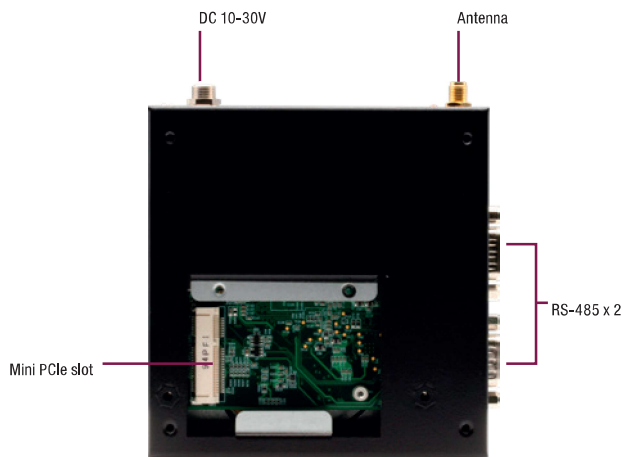

## Features

- ARM Cortex-A8 800 MHz RISC Processor
- Onboard DDR3L 1 GB
- eMMC 8G
- Built-in Micro SD Card Slot x 1
- 3G/4G LTE mini PCIe connector x 1
- NB-IoT connector x 1
- SIM card socket x 1
- Gigabit Ethernet RJ-45 x 2 LAN port
- USB2.0 x 2
- RS-485 x 2
- Micro USB x 1
- On board WiFi/Bluetooth Module x 1
- 4 LED lights controlled through GPIO
- Real time clock x 1
- DC10-30V
- Board to Board connector
- RS-485 termination resistor switch




## Specifications

System	
Processor	ARM Cortex-A8 800 MHz RISC Processor
System Memory	Onboard DDR3L 1GB
RTC	Serial real time clock x 1
Expansion Interface	3G/4G LTE mini PCIe connector; NB-IoT connector; SIM card socket x 1
Battery	3V CR2032 Lithium battery for RTC
Power Requirement	DC10-30V
Power Consumption	1.8 W
Dimension	4.3" x 4.33" x 1.54" (109 x 110 x 39 mm)
Gross Weight	430 g
Operation Temperature	32 °F ~ 140 °F (0 °C ~ 60 °C)
Storage Temperature	-40 °F ~ 176 °F (-40 °C ~ 80 °C)
Operation Humidity	10% ~ 95% relative humidity, non-condensing
MTBF (Hours)	855,590
Wireless	On board WiFi/Bluetooth Module x 1
I/O	
Storage	eMMC 8G; Micro SD slot
Serial Port	RS-485 x 2
LAN	Gigabit Ethernet, RJ-45 x 2
USB	USB 2.0 x 2
GPIO	4 LED control
Other Interface	—

### Dimension

Unit: mm

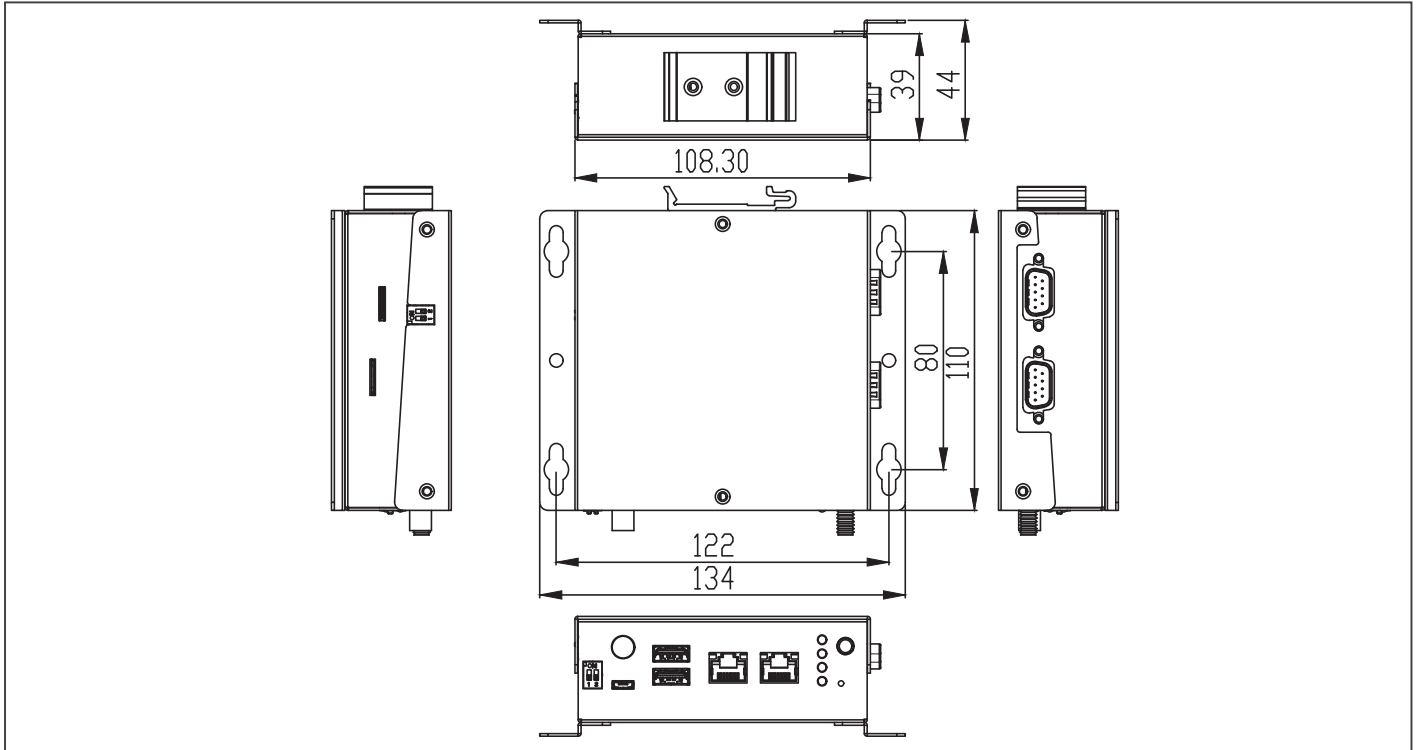

### Ordering Information

Part Number	CPU	Memory	Thermal	COM	Storage	LAN	USB	Expansion slot	Power	Operation Temp.	Others
SRG-3352C-A10-A001	ARM Cortex-A8 800MHz	Onboard DDR3L 1G	Fanless	RS-485 x 2	eMMC 8GB, MicroSD x1	GbE x 2	USB 2.0 x 2 Micro USB x 1	Mini PCIe slot x 1, SIM card socket x 1	DC 10-30V	0°C ~ 60°C @ 0.5 m/s airflow	3G/4G LTE module (optional)

### Packing List

- SRG-3352C

### Optional Accessories

- **1255300366**  
Power Adapter, AC/DC, 100-240VAC, 12VDC/3A, 36W.
- **9741EC25E0**  
PCIe mini card, 4G LTE module kit with cable & Antenna, EC25-E
- **9741EG25G0**  
PCIe mimi card, 4G LTE, module kit, Global Band W/SIM holder, W/Cable & antenna, Quectel, EG25-G
- **TBD**  
Din rail kit, 49 x 25mm
- **TBD**  
Wall mount kit, 110 x 26mm

### Installation Scenario



DIN-Rail Mount Illustration



Wall Mount Illustration