




Features

- Mobile Intel® Alder Lake U Core i CPU
- Medical Latest IEC 60601-1 & 60601-1-2 Certifications (MDR)
- 21.5" FHD AHVA Diagnostic Panel w/ P-Cap Multi-Touch
- Optional Hot-Swappable Batteries X3
- Fanless Design with Reliable Thermal Solution
- Dual storage M.2 SSD & 2.5" drive (w/ doggy door)
- Hospital White Plastic Housing w/ Anti-bacteria Treatment
- Battery Charger Station, 4KV Isolated I/O kit, DICOM GSDF Calibration & More Options for Diversified Applications
- Support PCIe4 Expansion Slot
- Optional DICOM Part 14 Module

Specification

Model	WMP 22P IP0A (STD)	WMP 22P IP0A (IP54)	WMP 22P IP0B (ISO)
CPU / Chipset	FCBGA1744 Intel® 12 th Gen. Core i7/i5/i3 & Celeron Processor (15W Max.) / SoC Support Vpro by Core i7/i5 CPU		
Graphic	Intel® Iris Xe Graphics (i7/i5 CPU) / Intel® UHD Graphics (i3 CPU)		
RAM	Two 4800 MHz DDR5 SODIMM Socket Support Dual Channel, non-ECC, up to 64GB		
OS Support	Optional Win 10 IoT Enterprise LTSC, Win 11 IoT Enterprise GAC		
Storage	1 x M.2 (M Key 2280) with PCIe4 for SSD, 1 x 2.5" SATA3 SSD/HDD w/doggy door (no doggy door for IP54 sku)		
Expansion	1 x PCIe4 (25W max.), 1 x M.2 E Key		
Display Size	21.5" wide TFT-Color LCD (16:9)		
Display	1920 x 1080 (Full HD), 16.7M colors (True 8 bit), 178(H) / 178(V), 250 nits (Typ. Center point), CR:1000: 1 (Typ)		
Touch Screen	Projected Capacitive Multi-Touch Panel / Light Transmission: ≥ 87% / Hardness: 7H pencil, pressure 750g/45° / Life: 50000		
USB	4 x USB3.2 gen II		4 x USB3.2 gen II, 1 x ISO USB2.0
COM	1 x RS-232, 1 x RS232/RS422/RS485		1 x ISO RS-232, 1 x ISO RS232/RS422/RS485
LAN	2 x RJ45 (1 x 1.0 Gbps, 1 x 2.5 Gbps)		2 x RJ45 (1 x 1.0 Gbps, 1 x 2.5 Gbps), 1 x ISO RJ45
Audio/ Video	1 x Line-out & 1 x Microphone-in (3.5mm phone jack) / 1 x DP1.4a, 1 x HDMI2.0, 1 x HDMI (video-in)		
Speakers & Mic.	2 x 2-watt Speakers & Integrated Microphone (at Housing Bottom Side)		
Reading light	2 x Light Bar (at housing bottom side)		
Control Hot Key (R to L)	Battery LED Indicator, Power On/Off, Volume +/-, Brightness +/-, Reading Light, LCD Backlight On/Off, Touch & Hot Key Enable/Disable, Function Key		
Cooling	Fanless Design with External Heatsink		
Battery Pack	Option 3xDR-202, Hot Swappable Battery	Option 1 x DR-202 UPS Battery	Option 3xDR-202 Series, Lithium-ion Battery, Hot Swappable Design
Power Input	DC-In x 1, DC 14-24V input		
Power Adapter	AC input 100~240V / 47 ~ 63 Hz / DC output 18V, 100W (Optional 180W)		
Temperature	Operating Temperature: 0~40°C (Burn-in, not airtight, W/ Battery 0~35°C) / Storage Temperature: -20~60°C		
Humidity	Operating & Storage: 10 ~ 90%, non-condensing		
IP Rating	Front IP65, Rear IPx1	Front IP65, Rear IP54	Front IP65, Rear IPX1
Housing	Front: Full flat design / Touch (standard)/ Glass (customized); Rear: Plastic White w/Anti-bacteria (MRSA) Housing		
Dimensions (Net)	541.0mm (H) x 352.9mm (V) x 56.0mm (T)		
Weights (Net)	7.0 kg (w/o power adapter/battery pack), 8.5 kg (w/ x3 battery pack & no power adaptor)		
Mounting	VESA 100 x 100		
Certification	FCC (part 18 Class B) / CE (EN 60601-1-2 :2015 ver. 4.0) / VCCI (2016-11, class B(PSU/Battery with PSE)) / UL (ES60601-1:2012 (V3.1) By Project / cUL (C22.2 No. 60601-1:2014 V3.1) By Project / MDR (2017/745) / ISO 14971 / IEC62133		

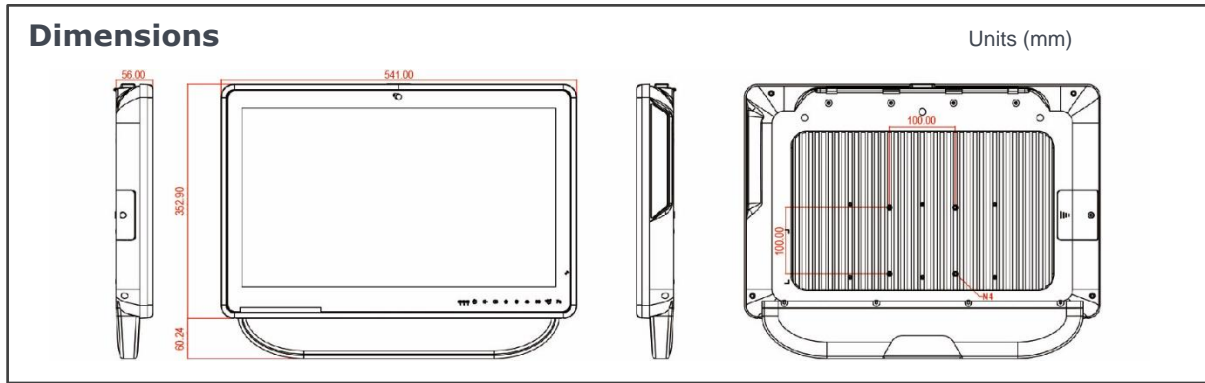


Major Options & Customization

Battery & Charger	<ul style="list-style-type: none"> ① Battery Pack: 3xDR-202 Series, Hot-Swappable Battery, or 1 x DR-202 UPS Battery for IP54 Sku ② Battery Charger Station: JW202W2 3-Slot w/200W Power Adaptor
Options	<ul style="list-style-type: none"> ① 5MP Auto Focus Webcam ② TPM 2.0 module ③ Smart Card Reader at side or CAC / PIV Reader (FIPS-201) (different rear housing) ④ RFID Reader (13.56MHz) ⑤ AG Film ⑥ Wifi WLAN + Bluetooth w/ 2x antenna ⑦ M.2 Type 2280 Module ⑧ 2.5" SATA3 Storage ⑨ Equipotential Terminal Pin ⑩ Full HD Capture Card or 4K SC710N1 12G SDI Capture Card ⑪ USB 2.0 x 2 at Side (different rear housing) ⑫ 5V1A Power Jack (for Standard Type) ⑬ Light Sensor for Auto Brightness (can't co-exist with webcam) ⑭ DICOM Part 14 Compliance (can't co-exist with light sensor) ⑮ DC-DC Extension Cable (2 meter) ⑯ I/O Cover (for better cables management) ⑰ White Color Metal Desktop Stand w/ Anti-bacterial Treatment ⑱ 30 watt power output card for external device ⑲ USB 5/6 (USB 2.0 can't co-exist with side USB)
Customization	<ul style="list-style-type: none"> ① Tempered Glass ② Touch Panel with Anti-glare Coating ③ COM Ports Support 5V1A Output


Order Information

Item	Configuration
WMP-22P-IP0A-i5	Core i5-1235U 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro
WMP-22P-IP0A-i7	Core i7-1255U 4.70GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro
WMP-22P-IP0A-i5UE	Core i5-1245UE 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro
WMP-22P-IP0B-i5-ISO	Core i5-1235U 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro / ISO
WMP-22P-IP0B-i5-IP54	Core i5-1235U 4.40GHz / DDR5 8G RAM / M.2 128G SSD / P.cap touch / Support Vpro / IP54


I/O ports

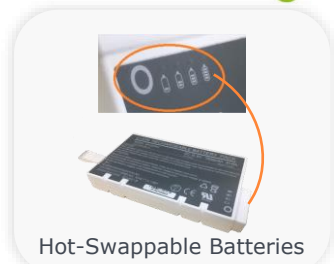

Hot-Swappable Batteries

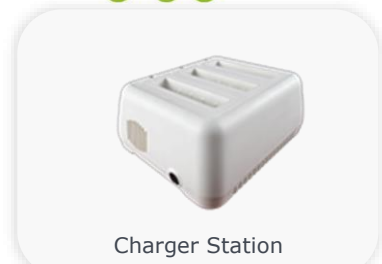

Charger Station



Medical Cart Application